


Prepared For:

Lin's Propane
ANDY JOHNSON
2281 Cedar Street
Dighton, MA 02715-
(508)669 - 6665
Reference ID: ISb Stock

Presented By:

HUNTER'S TRUCK SLS & SVC
Andy Keller
100 HUNTERS WAY
SMITHFIELD PA 15478 -
(724)564-4292

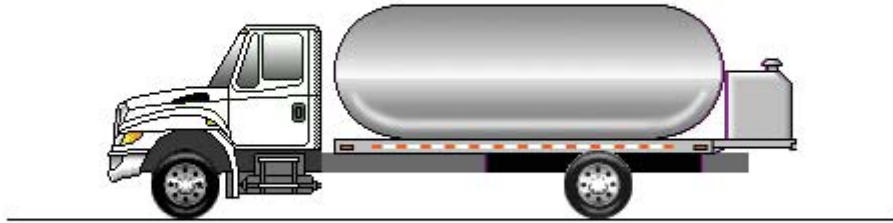

**Model Profile
2016 4300 SBA 4X2 (MA025)**

APPLICATION: Compressed Gas

MISSION: Requested GVWR: 33000. Calc. GVWR: 33000
Calc. Start / Grade Ability: 34.34% / 2.11% @ 55 MPH
Calc. Geared Speed: 87.8 MPH

DIMENSION: Wheelbase: 205.00, CA: 137.90, Axle to Frame: 75.00

ENGINE, DIESEL: {Cummins B6.7 325} EPA 2017, 325 HP @ 2400 RPM, 750 lb-ft Torque @ 1800 RPM, 2600 RPM Governed Speed, 325 Peak HP (Max)

TRANSMISSION, AUTOMATIC: {Allison 3000_RDS_P} 5th Generation Controls; Close Ratio, 6-Speed, With Double Overdrive; On/Off Hwy; Includes Oil Level Sensor, With PTO Provision, Less Retarder, With 80,000-lb GVW & GCW Max.

CLUTCH: Omit Item (Clutch & Control)

AXLE, FRONT NON-DRIVING: {Dana Spicer E-1002I} I-Beam Type, 10,000-lb Capacity

AXLE, REAR, SINGLE: {Dana Spicer S23-170D} Single Reduction, 23,000-lb Capacity, R Wheel Ends, Driver Controlled Locking Differential Gear Ratio: 5.57

CAB: Conventional

TIRE, FRONT: (2) 11R22.5 Load Range G HSR2 (CONTINENTAL), 498 rev/mile, 75 MPH, All-Position

TIRE, REAR: (4) 11R22.5 Load Range G HDL2 DL (CONTINENTAL), 491 rev/mile, 75 MPH, Drive

SUSPENSION, RR, SPRING, SINGLE: Vari-Rate; 23,500-lb Capacity, With 4500 lb Auxiliary Rubber Spring

PAINT: Cab schematic 100GA
Location 1: 9219, Winter White (Std)
Chassis schematic N/A

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)	<u>List</u> (US DOLLAR)
MA02500	Base Chassis, Model 4300 SBA 4X2 with 205.00 Wheelbase, 137.90 CA, and 75.00 Axle to Frame.	5474/2935	8409	\$79,642.00
1570	TOW HOOK, FRONT (2) Frame Mounted	8/0	8	\$73.00
1CAE	FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.125" x 3.580" x 0.312" (257.2mm x 90.9mm x 8.0mm); 460.0" (11684mm) Maximum OAL	105/303	408	\$515.00
1LNN	BUMPER, FRONT Full Width, Aerodynamic, Chrome Plated Steel; 0.142" Material Thickness	-1/0	-1	\$397.00
1WEJ	WHEELBASE RANGE 199" (505cm) Through and Including 254" (645cm)	0/0	0	\$349.00
2AGM	AXLE, FRONT NON-DRIVING {Dana Spicer E-1002I} I-Beam Type, 10,000-lb Capacity	25/0	25	\$486.00
	<u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.			
3ADB	SUSPENSION, FRONT, SPRING Parabolic, Taper Leaf; 10,000-lb Capacity; with Shock Absorbers	66/0	66	\$117.00
	<u>Includes</u> : SPRING PINS Rubber Bushings, Maintenance-Free			
	<u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.			
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications	100/30	130	(\$339.00)
	<u>Includes</u> : BRAKE LINES Color and Size Coded Nylon : DRAIN VALVE Twist-Type : GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster : PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel : PARKING BRAKE VALVE For Truck : QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4 : SLACK ADJUSTERS, FRONT Automatic : SLACK ADJUSTERS, REAR Automatic : SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4			
	<u>Notes</u> : Front and Rear Dust Shields not Included : Rear Axle is Limited to 19,000-LB GAWR with Code 04091 BRAKE SYSTEM, AIR and Code 04NDC BRAKES, REAR, AIR CAM Regardless of Axle/Suspension Ordered : Rear Axle is Limited to 20,000-LB GAWR with Code 04092 BRAKE SYSTEM, AIR and Code 04NCW BRAKES, REAR, AIR CAM Regardless of Axle/Suspension Ordered			

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)	<u>List</u> (US DOLLAR)
	: Rear Axle is Limited to 23,000-lb GAWR with Code 04091 BRAKE SYSTEM, AIR and Standard Rear Air Cam Brakes Regardless of Axle/Suspension Ordered			
4AZA	AIR BRAKE ABS {Bendix AntiLock Brake System} Full Vehicle Wheel Control System (4-Channel)	9/21	30	\$1,357.00
4EBT	AIR DRYER {Bendix AD-IP} with Heater	24/13	37	\$526.00
	<u>Includes</u> : AIR DRYER LOCATION Inside Left Rail, Back of Cab			
4EVH	BRAKE CHAMBERS, REAR AXLE {MGM TR3030LP3TSHD} 30/30 Spring Brake	0/0	0	\$150.00
	<u>Includes</u> : BRAKE CHAMBERS, SPRING (2) Rear Parking; WITH TRUCK BRAKES: All 4x2, 4x4; WITH TRACTOR BRAKES: All 4x2, 4x4; 6x4 & 6x6 with Rear Tandem Axles Less Than 46,000-lb. or GVWR Less Than 54,000-lb.			
4EXP	BRAKE CHAMBERS, FRONT AXLE {Bendix} 20 Sqn	17/0	17	\$0.00
4JCJ	BRAKES, FRONT, AIR CAM S-Cam; 16.5" x 5.0"; Includes 20 Sq. In. Long Stroke Brake Chambers	165/0	165	\$0.00
	<u>Notes</u> : Front Axle with 14,000-lb GAWR is Limited to 13,200-lb GAWR when used in Conjunction with 15" BRAKES, FRONT, AIR CAM. : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.			
4NDB	BRAKES, REAR, AIR CAM S-Cam; 16.5" x 7.0"; Includes 30/30 Sq.In. Long Stroke Brake Chamber and Spring Actuated Parking Brake	0/211	211	\$0.00
	<u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.			
4SPA	AIR COMPRESSOR {Cummins} 18.7 CFM Capacity	36/0	36	\$69.00
4VGA	AIR DRYER LOCATION Mounted Outside Right Rail, Forward of Front Wheel	0/0	0	\$48.00
5710	STEERING COLUMN Tilting and Telescoping	0/0	0	\$463.00
5CAL	STEERING WHEEL 2-Spoke, 18" Dia., Black	0/0	0	\$0.00
5PSA	STEERING GEAR {Sheppard M100} Power	25/0	25	\$110.00
6DAC	DRIVESHAFT {Dana Spicer} 1710 Series in lieu of SPL90 Series	4/19	23	\$272.00
7BEV	AFTERTREATMENT COVER Steel, Black	0/0	0	\$0.00
7BKS	EXHAUST SYSTEM Single Horizontal Aftertreatment Device, Frame Mounted Right Side Under Cab; for Single Vertical Tail Pipe, Frame Mounted Right Side Back of Cab	0/0	0	\$2,128.00
7SCP	ENGINE EXHAUST BRAKE for Cummins ISB/B6.7/ISL/L9 Engine with Variable Vane Turbo Charger	0/0	0	\$184.00

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)	<u>List</u> (US DOLLAR)
7WBA	TAIL PIPE (1) Turnback Type, Bright, for Single Exhaust	0/0	0	\$162.00
7WBS	MUFFLER/TAIL PIPE GUARD (1) Bright Stainless Steel	0/0	0	\$133.00
7WDM	EXHAUST HEIGHT 10'	0/0	0	\$0.00
7WZX	SWITCH, FOR EXHAUST 3 Position, Momentary, Lighted Momentary, ON/CANCEL, Center Stable, INHIBIT REGEN, Mounted in IP Inhibits Diesel Particulate Filter Regeneration When Switch is Moved to ON While Engine is Running, Resets When Ignition is Turned OFF	2/0	2	\$42.00
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment <u>Includes</u> : BATTERY BOX Steel : DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab : FUSES, ELECTRICAL SAE Blade-Type : HAZARD SWITCH Push On/Push Off, Located on Top of Steering Column Cover : HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever : JUMP START STUD Located on Positive Terminal of Outermost Battery : PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light : STARTER SWITCH Electric, Key Operated : STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector : TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature : TURN SIGNALS, FRONT Includes Reflectors and Auxiliary Side Turn Signals, Solid State Flashers; Flush Mounted : WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever : WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted : WIRING, CHASSIS Color Coded and Continuously Numbered	0/0	0	\$0.00
8541	HORN, ELECTRIC (2) Disc Style	1/0	1	\$29.00
8718	POWER SOURCE Cigar Type Receptacle without Plug and Cord	1/0	1	\$30.00
8GXD	ALTERNATOR {Leece-Neville AVI160P2013} Brush Type; 12 Volt 160 Amp. Capacity, Pad Mount, With Remote Sense	0/0	0	\$0.00
8HAB	BODY BUILDER WIRING Back of Standard Cab at Left Frame or Under Extended or Crew Cab at Left Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/Accessory Power/Ground and Sealed Connector for Stop/Turn	2/0	2	\$100.00
8MKL	BATTERY SYSTEM {International} Maintenance-Free, (3) 12- Volt 1950CCA Total	45/10	55	\$103.00
8RMA	RADIO AM/FM/WB/Clock/Bluetooth/USB Input/3MM Auxiliary Input, MP3, Apple Device Play & Control, Bluetooth for Phone & Music, with Multiple Speakers	1/0	1	\$483.00

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)	<u>List</u> (US DOLLAR)
8RMH	BATTERY DISCONNECT SWITCH {Cole-Hersee 75920-06} 300 Amp; Battery Box Mounted, Disconnects Charging Circuits, Locks with Padlock	2/0	2	\$176.00
8VUM	BATTERY BOX Aluminum With Plastic Cover, 18" Wide, 2, 3, or 4 Battery Capacity, Mounted Left Side Back of Cab	0/0	0	\$410.00
8WCL	HORN, AIR Black, Single Trumpet, Air Solenoid Operated	2/0	2	\$94.00
8WPB	HEADLIGHTS Halogen; Composite Aero Design for Two Light System; Includes Daytime Running Lights	0/0	0	\$58.00
8WPM	FOG LIGHTS (2) Clear, Oval, With H355W Halogen Bulb	5/0	5	\$133.00
	<u>Notes</u> : Fog Lights are Not Driving Lights			
8WTK	STARTING MOTOR {Delco Remy 38MT Type 300} 12 Volt; less Thermal Over-Crank Protection	0/0	0	\$0.00
8WTT	SWITCH, TOGGLE, FOR WORK LIGHT Lighted; on Instrument Panel and Wiring Effects for Customer Furnished End of Frame Light	1/0	1	\$66.00
8WWJ	INDICATOR, LOW COOLANT LEVEL With Audible Alarm	0/0	0	\$0.00
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III With Trip Indicators, Replaces All Fuses Except For 5-Amp Fuses	0/0	0	\$99.00
8XBK	SWITCH, AUXILIARY Switch 40 amp Circuit for Customer Use; Includes Wiring Connection at PDC and Control in Cab	2/0	2	\$84.00
9HAD	GRILLE Chrome	0/0	0	\$0.00
9WAC	BUG SCREEN Mounted Behind Grille	5/0	5	\$131.00
9WAY	FRONT END Tilting, Fiberglass, With Three Piece Construction	0/0	0	\$0.00
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100	0/0	0	\$0.00
	<u>Includes</u> : PAINT SCHEMATIC ID LETTERS "GA"			
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone	0/0	0	\$0.00
10WCY	SAFETY TRIANGLES	6/0	6	\$29.00
11001	CLUTCH Omit Item (Clutch & Control)	-65/-10	-75	\$0.00
12703	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection	0/0	0	\$0.00
12849	BLOCK HEATER, ENGINE 120V/1000W, for Cummins ISB/ B6.7/ISL/L9 Engines	3/0	3	\$88.00
12EKC	ENGINE, DIESEL {Cummins B6.7 325} EPA 2017, 325 HP @ 2400 RPM, 750 lb-ft Torque @ 1800 RPM, 2600 RPM Governed Speed, 325 Peak HP (Max)	0/0	0	\$5,486.00
12EMZ	VENDOR WARRANTY, ENGINE {Cummins} B6.7 Engine, 3- Year Unlimited Miles Standard Warranty	0/0	0	\$250.00
12THT	FAN DRIVE {Horton Drivemaster} Direct Drive Type, Two Speed With Residual Torque Device for Disengaged Fan Speed	25/0	25	\$274.00

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)	<u>List</u> (US DOLLAR)
	<u>Includes</u> : FAN Nylon <u>Notes</u> : Recommend Code 12THT when using front mount obstructions (winches, cones, reels, etc.) that restrict air flow through the radiator.			
12UYE	RADIATOR Aluminum; 2-Row, Cross Flow, Over Under System, 717 SqIn Louvered, With 313 SqIn Charge Air Cooler. With In-Tank Transmission Cooler	35/-4	31	\$0.00
	<u>Includes</u> : DEAERATION SYSTEM with Surge Tank : HOSE CLAMPS, RADIATOR HOSES Gates Shrink Band Type; Thermoplastic Coolant Hose Clamps : RADIATOR HOSES Premium, Rubber			
12VBR	AIR CLEANER With Service Protection Element	0/0	0	\$0.00
	<u>Includes</u> : GAUGE, AIR CLEANER RESTRICTION Air Cleaner Mounted			
12VXT	THROTTLE, HAND CONTROL Engine Speed Control; Electronic, Stationary, Variable Speed; Mounted on Steering Wheel	0/0	0	\$0.00
12WPV	OIL PAN 15 Quart Capacity, For Cummins ISB/B6.7 Engines	0/0	0	\$0.00
12WZB	EMISSION COMPLIANCE Low NOx Idle Engine, Complies with California Clean Air Regulations; Includes "Certified Clean Idle" Decal on Hood	0/0	0	\$62.00
12XAT	ENGINE CONTROL, REMOTE MOUNTED Provision for; Includes Wiring for Body Builder Installation of PTO Controls; With Ignition Switch Control for Cummins ISB/B6.7 or ISL/L9 Engines	0/0	0	\$45.00
12XZE	FEDERAL EMISSIONS {Cummins B6.7} EPA, OBD and GHG Certified for Calendar Year 2017	0/0	0	\$700.00
13AVR	TRANSMISSION, AUTOMATIC {Allison 3000_RDS_P} 5th Generation Controls; Close Ratio, 6-Speed, With Double Overdrive; On/Off Hwy; Includes Oil Level Sensor, With PTO Provision, Less Retarder, With 80,000-lb GVW & GCW Max.	143/45	188	\$10,133.00
13WBL	TRANSMISSION SHIFT CONTROL {Allison} Push-Button Type; for Allison 3000 & 4000 Series Transmission	0/0	0	\$0.00
13WLP	TRANSMISSION OIL Synthetic; 29 thru 42 Pints	0/0	0	\$203.00
13WUC	ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS); General Purpose Trucks, Construction	0/0	0	\$0.00
13WYU	SHIFT CONTROL PARAMETERS Allison 3000 or 4000 Series Transmissions, 5th Generation Controls, Performance Programming	0/0	0	\$0.00
13XAM	PTO LOCATION Dual, Left and Right Side of Transmission	0/0	0	\$0.00
14AHC	AXLE, REAR, SINGLE {Dana Spicer S23-170D} Single Reduction, 23,000-lb Capacity, R Wheel Ends, Driver Controlled Locking Differential . Gear Ratio: 5.57	0/263	263	\$1,878.00

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)	<u>List</u> (US DOLLAR)
	<u>Includes</u> : REAR AXLE DRAIN PLUG (1) Magnetic, For Single Rear Axle			
	<u>Notes</u> : The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires. : When Specifying Axle Ratio, Check Performance Guidelines and TCAPE for Startability and Performance			
14VAH	SUSPENSION, RR, SPRING, SINGLE Vari-Rate; 23,500-lb Capacity, With 4500 lb Auxiliary Rubber Spring	0/66	66	\$133.00
	<u>Notes</u> : The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.			
14WMG	AXLE, REAR, LUBE {EmGard FE-75W-90} Synthetic Oil; 30 thru 39.99 Pints	0/0	0	\$198.00
15LMK	LOCATION FUEL/WATER SEPARATOR Mounted Outside Left Rail 54" Back of Cab	0/0	0	\$70.00
15LMN	FUEL/WATER SEPARATOR {Racor 400 Series,} 12 Volt Pre-Heater, with Primer Pump, and WIF Sensor	3/3	6	\$123.00
15SRE	FUEL TANK Top Draw; D-Style, Non-Polished Aluminum, 19" Deep, 50 U.S. Gal., 189 L Capacity, with Quick Connect Outlet, Mounted Left Side, Under Cab	3/3	0	\$155.00
	<u>Notes</u> : N/A with 19.5" Tires			
15WDG	DEF TANK 7 U.S. Gal. 26.5L Capacity, Frame Mounted Outside Left Rail, Under Cab	0/0	0	\$0.00
16030	CAB Conventional	0/0	0	\$0.00
	<u>Includes</u> : ARM REST (2) Molded Plastic; One Each Door : CLEARANCE/MARKER LIGHTS (5) Flush Mounted : COAT HOOK, CAB Located on Rear Wall, Centered Above Rear Window : CUP HOLDERS Two Cup Holders, Located in Lower Center of Instrument Panel : DOME LIGHT, CAB Rectangular, Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Console, Center Mounted : GLASS, ALL WINDOWS Tinted : GRAB HANDLE, CAB INTERIOR (1) "A" Pillar Mounted, Passenger Side : GRAB HANDLE, CAB INTERIOR (2) Front of "B" Pillar Mounted, One Each Side : INTERIOR SHEET METAL Upper Door (Above Window Ledge) Painted Exterior Color			
16HBA	GAUGE CLUSTER English With English Electronic Speedometer	0/0	0	\$0.00

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)	<u>List</u> (US DOLLAR)
	<u>Includes</u> : GAUGE CLUSTER (5) Engine Oil Pressure (Electronic), Water Temperature (Electronic), Fuel (Electronic), Tachometer (Electronic), Voltmeter : ODOMETER DISPLAY, Miles, Trip Miles, Engine Hours, Trip Hours, Fault Code Readout : WARNING SYSTEM Low Fuel, Low Oil Pressure, High Engine Coolant Temp, and Low Battery Voltage (Visual and Audible)			
16HGH	GAUGE, OIL TEMP, AUTO TRANS , for Allison Transmission	1/0	1	\$48.00
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster	0/0	0	\$0.00
16HLJ	GAUGE, DEF FLUID LEVEL	0/0	0	\$0.00
16JNV	SEAT, DRIVER {National 2000} Air Suspension, High Back With Integral Headrest, Cloth, Isolator, 1 Chamber Lumbar, 2 Position Front Cushion Adjust, -3 to +14 Degree Back Angle Adjust	-15/-10	-25	\$157.00
	<u>Includes</u> : SEAT BELT 3-Point, Lap and Shoulder Belt Type			
16SDE	MIRROR, CONVEX, LOOK DOWN {Lang Mekra} Right Side; 6" x 10 1/4"	2/0	2	\$49.00
16SEE	GRAB HANDLE Chrome; Towel Bar Type With Anti-Slip Rubber Inserts; for Cab Entry Mounted Left Side Only at "B" Pillar	3/0	3	\$118.00
16SMR	SEAT, PASSENGER {National} Non Suspension, High Back With Integral Headrest, Cloth, With Fixed Back, With Under Seat Storage	29/12	41	\$504.00
16SNB	MIRRORS (2) {Lang Mekra} Rectangular, Thermostatically Controlled Heated Heads, Black Heads, Brackets and Arms, Breakaway Type, 7.55" x 14.1" Integral Convex Both Sides, 102" Inside Spacing	-3/0	-3	\$126.00
16VHG	CAB MOUNTING HEIGHT EFFECTS Mid Cab in Lieu of Low Cab Mounting Height (Approx. 4") With Cab Air Suspension	69/-5	64	\$572.00
16WBY	ARM REST, RIGHT, DRIVER SEAT	3/0	3	\$39.00
16WCT	AIR CONDITIONER {Blend-Air} With Integral Heater & Defroster	66/5	71	\$923.00
	<u>Includes</u> : HEATER HOSES Premium : HOSE CLAMPS, HEATER HOSE Mubea Constant Tension Clamps : REFRIGERANT Hydrofluorocarbon HFC-134A			
16WJS	INSTRUMENT PANEL Center Section, Flat Panel	0/0	0	\$0.00
16WJU	WINDOW, POWER (2) and Power Door Locks, Left and Right Doors, Includes Express Down Feature	5/0	5	\$367.00
16WRZ	CAB INTERIOR TRIM Premium	0/0	0	\$304.00
	<u>Includes</u> : "A" PILLAR COVER Molded Plastic : CAB INTERIOR TRIM PANELS Cloth Covered Molded Plastic, Full Height; All Exposed Interior Sheet Metal is Covered Except			

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)	<u>List</u> (US DOLLAR)
	for the Following: with a Two-Man Passenger Seat or with a Full Bench Seat the Back Panel is Completely Void of Covering : CAB SOUND INSULATION Includes Dash and Engine Cover Insulators : CONSOLE, OVERHEAD Molded Plastic; With Dual Storage Pockets with Retainer Nets, CB Radio Pocket, Speakers, and Reading Lights : COURTESY LIGHT (2) Mounted In Front Map Pocket Left and Right Side : DOOR TRIM PANELS with Cloth Insert on Bolster Driver and Passenger Doors : FLOOR COVERING Rubber, Black : GAUGE, TEMPERATURE, AMBIENT Includes Wiring and Sensor With Display Unit Mounted in Cluster : HEADLINER Soft Padded Cloth : INSTRUMENT PANEL TRIM Molded Plastic with Black Center Section : STORAGE POCKET, DOOR (2) Molded Plastic (Carpet Texture), Full-Length; Driver and Passenger Doors : SUN VISOR (3) Padded Vinyl: 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Vanity Mirror and Toll Ticket Strap, plus 1 Auxiliary Visor (Front Only), Driver Side			
16WSL	MIRROR, CONVEX, HOOD MOUNTED (2) {Lang Mekra} for Left and Right Sides 7.44" Sq.	11/0	11	\$137.00
27DMC	WHEELS, FRONT DISC; 22.5x8.25 Rims, Polished Aluminum, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs	-58/0	-58	\$463.00
	<u>Notes</u> : Aluminum Wheels not Painted or Coated : COMPATIBLE TIRE SIZES: 11R22.5, 12R22.5, 255/70R22.5, 255/80R22.5, 265/75R22.5, 275/70R22.5, 275/80R22.5, 295/75R22.5, 295/80R22.5			
28DMC	WHEELS, REAR DUAL DISC; 22.5x8.25 Rims, Polished Aluminum, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs	0/-109	-109	\$971.00
	<u>Notes</u> : Aluminum Wheels not Painted or Coated : COMPATIBLE TIRE SIZES: 11R22.5, 12R22.5, 255/70R22.5, 255/80R22.5, 265/75R22.5, 275/70R22.5, 275/80R22.5, 295/75R22.5, 295/80R22.5 : Polished Surface Outside Dual Only			
29580	WHEEL SEALS, FRONT {International} Oil-Lubricated Wheel Bearings	0/0	0	\$37.00
7372135415	(2) TIRE, FRONT 11R22.5 Load Range G HSR2 (CONTINENTAL), 498 rev/mile, 75 MPH, All-Position	64/0	64	\$218.00
7372135417	(4) TIRE, REAR 11R22.5 Load Range G HDL2 DL (CONTINENTAL), 491 rev/mile, 75 MPH, Drive	0/196	196	\$772.00
OBD001	MISCELLANEOUS 8WMA and 08WTT	0/0	0	\$84.00
	Total of Product Features			\$114,596.00